

Features

- Compliant with SFF-8431, SFF-8432 and IEEE802.3ae
- CWDM EML transmitter from 1470nm to 1610nm
- PIN photo-detector
- Low power consumption
- Applicable for 40km SMF connection
- All-metal housing for superior EMI performance
- Advanced firmware allow customer system encryption information to be stored in transceiver
- Cost effective SFP+ solution, enables higher port densities and greater bandwidth.
- RoHS compliant (lead Free)
- Operating case temperature: 0°C ~ 70°C



Applications

- 10GBASE-ER (with/without FEC)
- 10G Ethernet
- 2G/4G/ 8G/10G Fiber Channel

Description

This SFP+ CWDM Transceiver is a “Limiting module”, designed for 10GBASE-ER, and 2G/4G/ 8G/10G Fiber-Channel applications.

The transceiver consists of two sections: The transmitter section incorporates a colded EML laser. And the receiver section consists of a PIN photodiode integrated with a TIA. All modules satisfy class I laser safety requirements. Digital diagnostics functions are available via a 2-wire serial interface, as specified in SFF-8472, which allows real-time access to device operating parameters such as transceiver temperature, laser bias current, transmitted optical power, received optical power and transceiver supply voltage.

Absolute Maximum Ratings

Parameters	Symbol	Min.	Max.	Units
Power Supply Voltage	V_{CC}	-0.5	+3.8	V
Storage Temperature	T_c	-40	+85	°C
Operating Case Temperature	T_c	0	+70	°C
Relative Humidity	RH	0	85	%
RX Input Average Power	P_{max}	-	0	dBm

Recommended Operating Conditions

Parameter	Symbol	Min.	Typ.	Max.	Units
Supply Voltage	V_{CC}	3.13	3.3	3.47	V
Supply current	I_{CC}	-	-	360	mA
Operating Case temperature	T_{ca}	-5	-	70	°C
Module Power Dissipation	P_m	-	1.2	1.5	W

Digital Diagnostic Functions

	Symbol	Min.	Max	Unit	Notes
Accuracy					
Transceiver Temperature	DMI_Temp	-3	+3	°C	Over operating temp
TX Output optical power	DMI_TX	-3	+3	dB	
RX Input optical power	DMI_RX	-3	+3	dB	0dBm to -18dBm range
Transceiver Supply voltage	DMI_VCC	-0.08	+0.08	V	Full operating range
Bias current monitor	DMI_Ibias	-10%	10%	mA	
Dynamic Range Accuracy					
Transceiver Temperature	DMI_Temp	-5	70	°C	
TX Output optical power	DMI_TX	-5	+4	dBm	
RX Input optical power	DMI_RX	-20	-7	dBm	
Transceiver Supply voltage	DMI_VCC	3.0	3.6	V	
Bias current monitor	DMI_Ibias	0	100	mA	

Optical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Note
Transmitter						
Center wavelength	λ	($\lambda - 6.5$)		($\lambda + 6.5$)	nm	5
Side Mode Suppression Ratio	<i>SMSR</i>	30			dB	
Average launched power	<i>Pave</i>	-2		+3	dBm	1
Optical Modulation Amplitude (OMA)	<i>Poma</i>	-2.5			dBm	
Transmitter and dispersion penalty	<i>TDP</i>			3.2	dB	3,4
Average launch power of OFF transmitter	<i>Poff</i>			-30	dBm	
Extinction ratio	<i>ER</i>	3.5			dB	2
Relative Intensity Noise				-128	dB/Hz	
Optical Return Loss Tolerance	<i>RIN</i>	12			dB	
Receiver						
Center wavelength	λ	1260		1600	nm	
Receive overload	<i>Pave</i>			-8	dBm	
Receive sensitivity	<i>Rsen</i>			-14.4	dBm	3
Receiver Reflectance (max)	<i>Rrx</i>			-14	dB	
LOS De-Assert	<i>LOSd</i>			-22	dBm	
LOS Assert	<i>LOSa</i>	-35			dBm	
LOS Hysteresis	<i>LOSh</i>	0.5			dB	

Notes:

1. The optical power is launched into SMF
2. Measured with a PRBS 2³¹-1 test pattern@10.3125Gbps
3. Measured with a PRBS 2³¹-1 test pattern@10.3125Gbps BER≤10⁻¹²
4. In G.652 and G.655(NDSF)
5. The available transmitter center wavelengths (λ) are: 1271nm, 1291nm, 1311nm... and 1610nm as specified in the "Product Selection" section on page 1.


Electronical Characteristics

Parameter	Symbol	Min.	Typ.	Max.	Units	Note
Transmitter						
Data Rate		0.6	10.3125	11.3	Gbps	
Power Consumption		-	1200	1500	mW	
Input differential impedance	Rin		100		Ω	1
Differential data input swing	Vin,pp	180		700	mV	
Tx Fault	VoL	-0.3		0.4	V	
Data Dependent Input Jitter	DDJ			0.10	UI	
Data Input Total Jitter	TJ			0.28	UI	
Receiver						
Differential data output swing	Vout,pp	300		850	mV	2
Rx Output Rise and Fall Time	Tr/Tf	28		50	ps	3
Total Jitter	TJ			0.70	UI	
Deterministic Jitter	DJ			0.42	UI	


Notes:

1. Connected directly to TX data input pins. AC coupling from pins into laser driver IC.
2. Into 100 Ω differential termination.
3. 20 – 80%. Measured with Module Compliance Test Board and OMA test pattern. Use of four 1's and four 0's sequence in the PRBS 9 is an acceptable alternative. SFF-8431 Rev 3.0.

Host Board Power Supply Filters Circuit

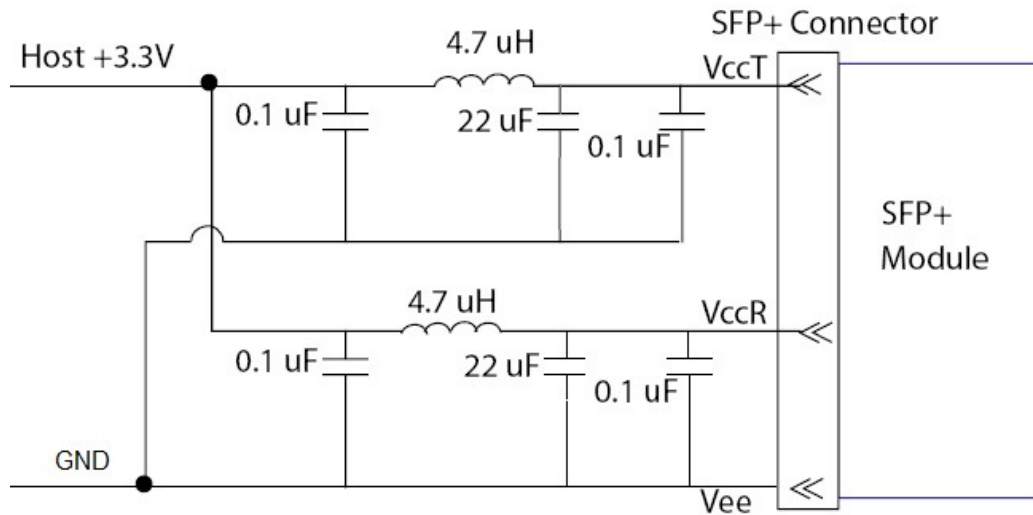

Block Diagram of Transceiver

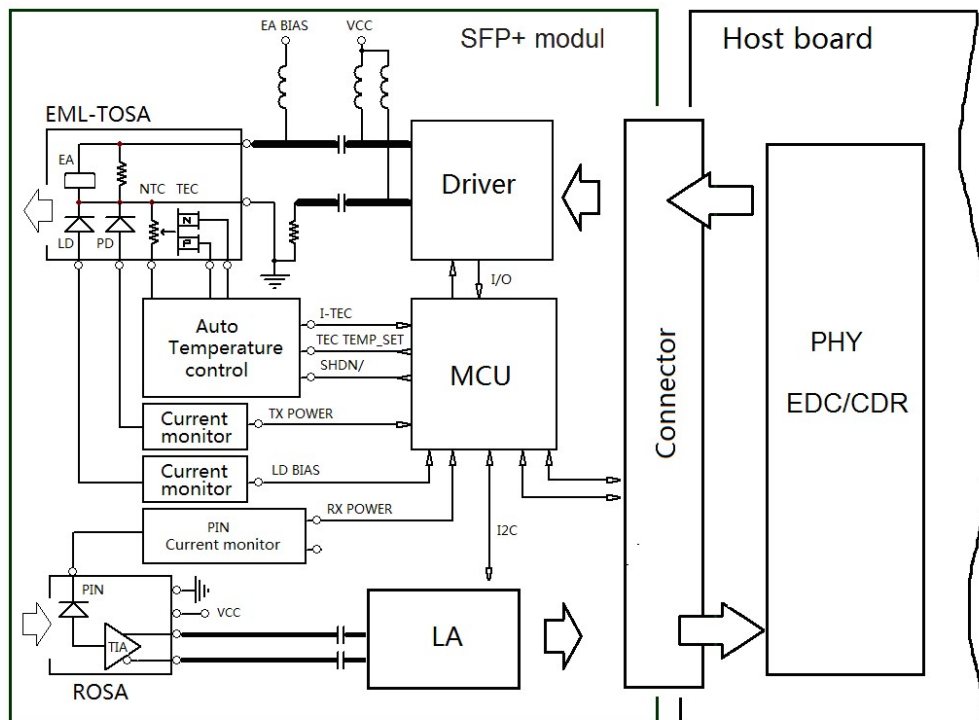

Gigalight 2011 --HHC






Pin Assignment

Pin	Symbol	Function/Description	Note
1	VEET	Transmitter Ground	1
2	Tx_FAULT	Transmitter Fault	2
3	Tx_DIS	Transmitter Disable. Laser output disabled on high or open	3
4	SDA	2-wire Serial Interface Data Line	2
5	SCL	2-wire Serial Interface Clock Line	2
6	MOD_ABS	Module Absent. Grounded within the module	4
7	RS0	Rate Select 0	5
8	RX_LOS	Loss of Signal indication. Logic 0 indicates normal operation	2
9	RS1	Rate Select 1	5
10	VEER	Receiver Ground	1
11	VEER	Receiver Ground	1
12	RD-	Receiver Inverted DATA out. AC Coupled	
13	RD+	Receiver DATA out. AC Coupled	
14	VEER	Receiver Ground	1
15	VCCR	Receiver Power Supply	
16	VCCT	Transmitter Power Supply	
17	VEET	Transmitter Ground	1
18	TD+	Transmitter DATA in. AC Coupled	
19	TD-	Transmitter Inverted DATA in. AC Coupled	
20	VEET	Transmitter Ground	1

Notes:

1. Module circuit ground is isolated from module chassis ground within the module.
2. Should be pulled up with 4.7k – 10k ohms on host board to a voltage between 3.15V and 3.6V.
3. Tx Disable is an input contact with a 4.7 kΩ to 10 kΩ pullup to VccT inside the module.
4. Mod_ABS is connected to VeeT or VeeR in the SFP+ module. The host may pull this contact up to Vcc_Host with a resistor in the range 4.7 kΩ to 10 kΩ. Mod_ABS is asserted “High” when the SFP+ module is physically absent from a host slot.
5. RS0 and RS1 are module inputs and are pulled low to VeeT with > 30 kΩ resistors in the module.


Dimensions

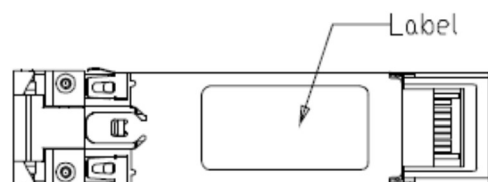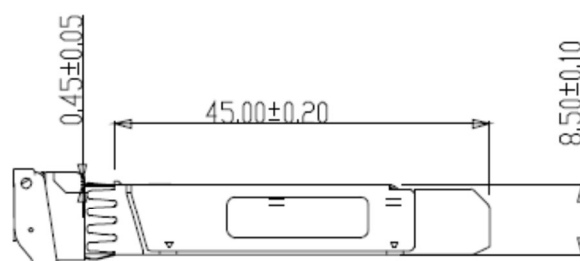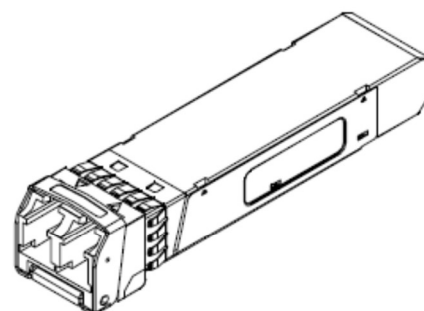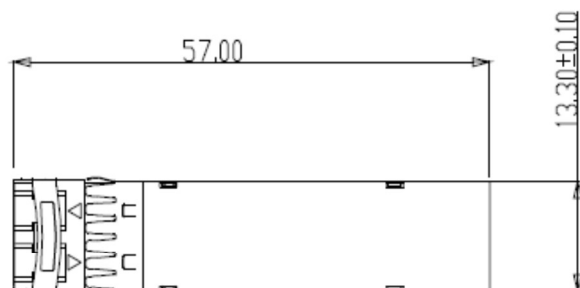

Mechanical Specifications

Optical Receptacle Cleaning Recommendations :

All fiber stubs inside the receptacle portions were cleaned before shipment. In the event of contamination of the optical ports, the recommended cleaning process is the use of forced nitrogen. If contamination is thought to have remained, the optical ports can be cleaned using a NTT international Cletop® stick type and HFE7100 cleaning fluid. Before the mating of patch-cord, the fiber end should be cleaned up by using Cletop® cleaning cassette.

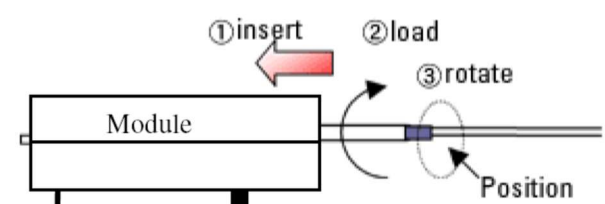Cleaning of patch-cord	Cleaning of fiber stub
	 1. Insert Ensure that stick is held straight when inserting into sleeve. 2. Load Apply sufficient pressure (approx 600-700g) to ensure ferrule a little depressed in sleeve. 3. Rotate Rotate stick clockwise 4-5 times, while ensuring direct contact with ferrule end-face is maintained. <i>Notice: Number of possible wipes: Maintenance (repair) ~1 use / piece Equipment construction: 4 uses / piece (max.)</i>

Note: The pictures were extracted from NTT-ME website. And the Cletop® is a trademark registered by NTT-ME

Ordering Information

<i>Model Number</i>	<i>Part Number</i>	<i>Distance</i>	<i>Voltage</i>	<i>Temperature</i>
SFP-10G-CWDM 40km	OPAK-C20-yy-CF	40km	3.3V	0°C to 70 °C

Note: yy=47, Center Wavelength=1470nm ~ yy=61, Center Wavelength=1610nm

Modification History

<i>Revision</i>	<i>Date</i>	<i>Description</i>
A1	Jan.2021	Initial Release

Note: All information contained in this document is subject to change without notice.