



### Features

- Small / Compact Housing Design
- QSFP Available
- RoHS Compliant

### Applications

- Data Center Infrastructure
- Parallel Optics
- Storage Area Network and Fiber Channel
- 40G and 100Gbps Protocols

### Description


MPO Loopback is used for network, or optical link test, all 40/100G network.

The MPO Loopback which strictly complies with the RoHS, not only meets the criteria of both TIA/EIA 604-5 and IEC 61754-7, but also provides compacted spec for a test of Burn in and network component.

### Specification

<i>Operation Wavelength</i>	1310/1550nm
<i>Attenuation Tolerance</i>	±1dB( at 2-10dB), ±10%( at 11-20dB)
<i>Return Loss</i>	60dB(8°Polishing)
<i>Operating Temperature</i>	-25°C~75°C
<i>Attenuation</i>	1~20dB
<i>Housing Dimension</i>	Height 5.9 mm/Length 25.3mm/Width 16.2mm

**Dimension**

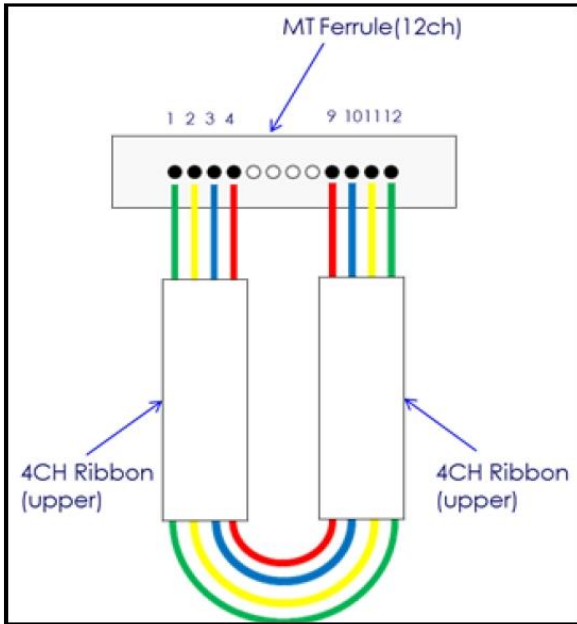

optech